


- DEV 3480 - MODULO Active Frame**
- DEV 3481 - MODULO Passive Frame**
- DEV 3490 - MODULO AC/DC Power Supply**
- DEV 3491 - MODULO DC/DC Power Supply**

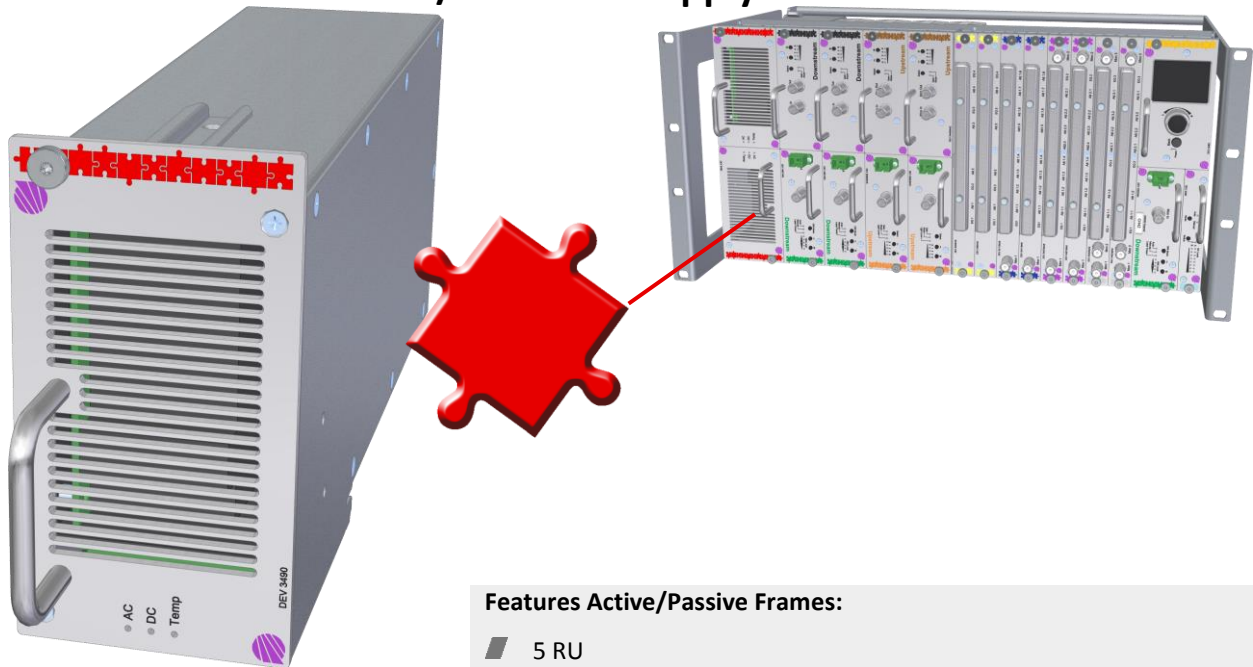


Features Active/Passive Frames:

- 5 RU
- Up to 18 active Modules + 2 Power Supplies (DEV 3480)
- Up to 22 1:8/8:1 Splitter/Combiner
- Up to 44 1:4/4:1 Splitter/Combiner
- Up to 66 1:2/2:1 Splitter/Combiner
- 50% higher Density than conventional Products
- Cable Relief on the Rear

Features Power Supplies:

- 200 W @ 45 °C
- 1+1 redundant Configuration
- Local LED Monitoring

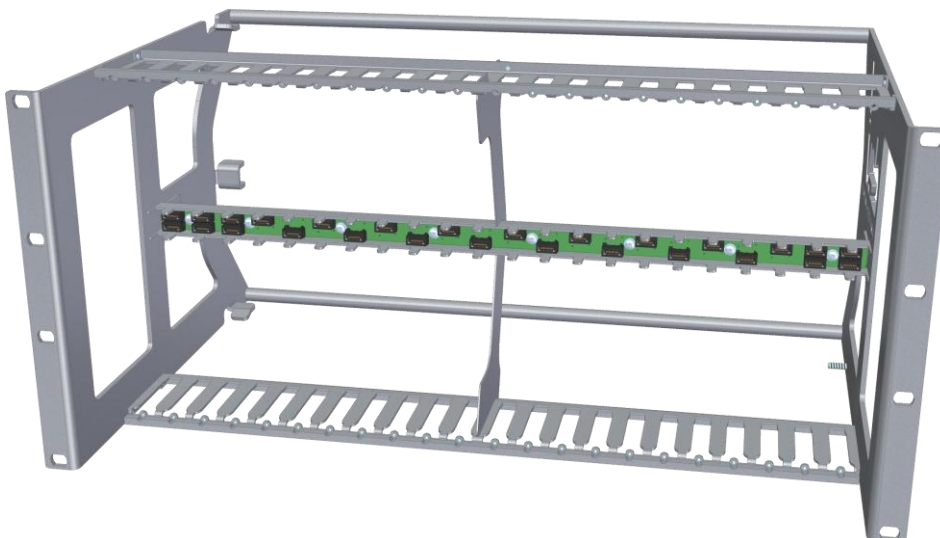

Technical Data DEV 3480 & DEV 3481

	Value	Condition
General Specification		
Dimensions	19" (483 mm) Width, 5 RU (221 mm) Height, 11.8" (300 mm) Depth	
Weight	2 kg	
Number of 5 RU Slots	22	
Number of 2.5 RU Slots	44	

Technical Data DEV 3490

	Value	Condition
General Specification		
Supply Voltage	100...240 V AC	
Output Voltage	24 VDC	
Output Power	200 W	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1	
Operating Temperature	0...50 °C (32...122 °F)	
Storage Temperature	-40...+70 °C (-40...+158 °F)	
Storage Humidity	5...95 %	Non-condensing

Technical Data DEV 3491

	Value	Condition
General Specification		
Supply Voltage	-36...-72 VDC & +36...+72 VDC	
Output Voltage	24 VDC	
Output Power	200 W	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1	
Operating Temperature	0...50 °C (32...122 °F)	
Storage Temperature	-40...+70 °C (-40...+158 °F)	
Storage Humidity	5...95 %	Non-condensing

Order Information

Products	
DEV 3480	MODULO Active Frame; 5 RU
DEV 3481	MODULO Passive Frame; 5 RU
DEV 3490	MODULO Power Supply; 100...240 V; 2.5 RU, 200 W
DEV 3491	MODULO Power Supply; -36...-72 VDC & +36...+72 VDC; 2.5 RU, 200 W

Contact

DEV Systemtechnik GmbH & Co. KG
 Grüner Weg 4A
 61169 Friedberg
 GERMANY
 Phone: +49 6031 6975 100
 Fax: +49 6031 6975 114
 info@dev-systemtechnik.com
 www.dev-systemtechnik.com

Rev. 09-Feb-2017

Technical specifications are subject to change