

3067VIP-3G-HW-2A

Quad Output, Compact Multi-Image Display Processor


The 3067VIP-3G-HW-2A is an advanced high-density multi-image display processor. It supports 16, 18, 24 or 32 SD, HD and 3Gb/s SDI automatic format detection inputs and up to 4 unique display outputs. The 3067VIP-3G-HW-2A offers seamless UHD input monitoring (no visible quadrant) and can drive UHD displays at their native resolution. Each 3067VIP-3G-HW-2A input can be displayed in any size, position or aspect ratio on any display. The 3067VIP-3G-HW-2A provides the best quality input reproduction, leveraging the same video processing technology as Evertz conversion products.

The 3067VIP-3G-HW-2A features hot-swappable boards and can be installed in any 1RU, 3RU or 6RU EMX series of frames with optional redundant power supplies. The 3067VIP-3G-HW-2A is VistaLINK® enabled offering remote monitoring, control and configuration capabilities via SNMP. The 3067VIP-3G-HW-2A is also easily configurable via its integrated web interface. Display layouts can be designed in a live control environment using a VUE-WEB (web browser). Additional features include automatic aspect ratio adjustment per source basis, graticule generation, VITC/HD time code decode, closed captioning decode/burn-in and more.



►Features & Benefits

- Accepts 16, 18, 24 or 32 3G/HD/SD inputs with 16 channels of embedded audio (license upgradeable)
- Auto-sensing SD, HD and 3Gbps inputs
- Supports quad square division UHD inputs stitching also support monitoring of independent 2SI quadrant
- Supports dual UHD (3840x2160) output or 4 outputs up to 1920x1200 resolution
- Best image quality in industry
- Allows fullscreen viewing of any input on any output
- Supports for dynamic under monitoring displays (UMD) and tallies from router and switcher
- Supports advanced on screen graphics, including analog clock, transparency control of objects, raised bezels and borders, custom background, custom logo per display
- Supports up to 3 TrueType fonts including non-Latin alphabets
- Built-in graticule generator, user defined per window
- Enables the decoding and display of VITC/ATC (SMPTE ST 12-1, 12M-2) time code
- Audio, video and data fault monitoring with on screen fault notification
- VistaLINK® capable for configuration and monitoring via SNMP
- One frame processing delay
- Real-time control of display output via web based layout design tool (VUE-WEB)
- Decoding and burn-in of 608 and 708 captions as well as Teletext
- Monitoring of the full 16 channels of embedded audio per input
- Loudness monitoring per ITU 1770, ATSC A/85 and EBU R 128
- Dolby® E audio monitoring with surround sound bar graph (one per input)

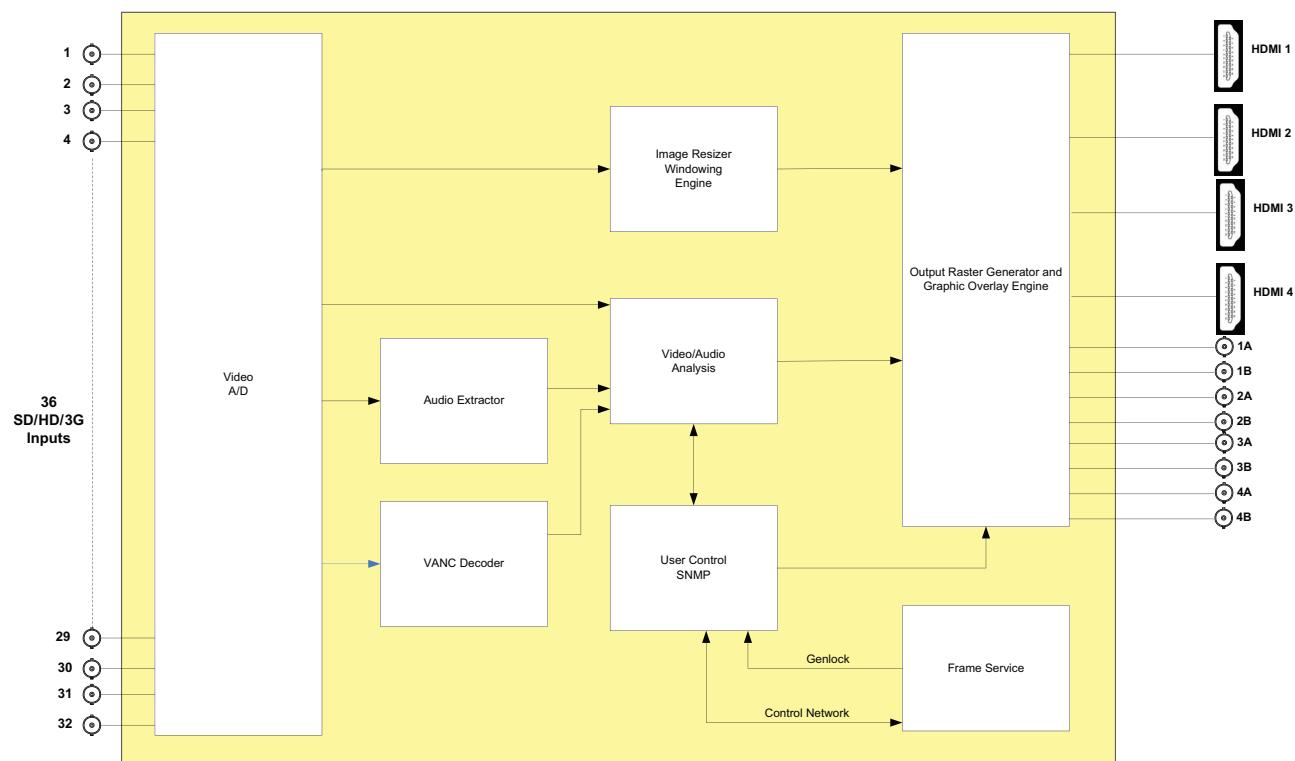

► Specifications

Serial Video Inputs:	Number of Outputs: up to 4 Connector: HDMI	Genlock Input: Type: NTSC/PAL color black Level: 1V p-p nominal Connector: Uses EMX6-FR, EMX3-FR or EMX1-FR frame genlock BNC
Standards: 3G (SMPTE ST 424M/424M-AB) HD-SDI (SMPTE ST 292-1), and/or SD-SDI (SMPTE ST 259-C)	Connector: Mini-DIN 1.0/2.3	Serial Video Output: Standard: 3G/HD/SD best fit based on resolution selected (3G, 1080i, 720P, 625, 525) Supports dual UHD output Square division or 2SI
Number of Inputs: 16, 18, 24, 32 Connector: Mini-DIN 1.0/2.3	Number of Outputs: 8 (maximum 4 unique outputs) Connector: Mini-DIN 1.0/2.3 Signal Level: 800mV nominal DC Offset: 0V ± 0.5V	Ethernet: Network Type: Fast Ethernet 100 Base-TX 1EEE 802.3U standard for 100Mbps baseband CSMA/CD local area network Connector: RJ-45 via frame controller
Equalization: SD-SDI: Automatic to 200m @ 270 Mb/s with Belden 1694A (equiv.) HD-SDI: Automatic to 100m @ 1.5 Gb/s with Belden 1694A (equiv.) 3G: Automatic to > 50m @ 3 Gb/s with Belden 1694A (equiv.)	Rise and Fall Time: HD: 200ps nominal SD: 740ps nominal Overshoot: < 10% of amplitude	Electrical: Voltage: +12V DC Power: 130W EMI/RFI: Complies with FCC part 15, Class A EU EMC directive
Return Loss: > 15dB up to 1.5 Gb/s Embedded Audio: SMPTE ST 272-A, ST 299-1		Physical: Number of Slots: 2
Display Video Output: Standard: HDMI 2.0 Resolutions: Up to quad output at 1920x1200 or dual output at UHD (3840x2160)		

► Ordering Information

3067VIP-3G-HW-2A Multi-image Display processor hardware

Monitoring Options:

Input/Output Options:	
+16x4	License key enabling 16x auto-sensing 3G/HD/SD inputs and quad outputs up to 1920x1200 resolution, or dual UHD output
+18x4	License key enabling 18x auto-sensing 3G/HD/SD inputs and quad outputs up to 1920x1200 resolution, or dual UHD output
+24x4	License key enabling 24x auto-sensing 3G/HD/SD inputs and quad outputs up to 1920x1200 resolution, or dual UHD output
+32x4	License key enabling 32x auto-sensing 3G/HD/SD inputs and quad outputs up to 1920x1200 resolution, or dual UHD output

+SM	Standard AVM monitoring; audio: low/high/loss, video: black/frozen/loss
+MCR	Dolby® E audio monitoring, loudness monitoring, CC/Teletext subtitle decode/monitoring, VANC data monitoring; includes +SM monitoring features